





8FG51-16

Rev: 0

Frequency Response

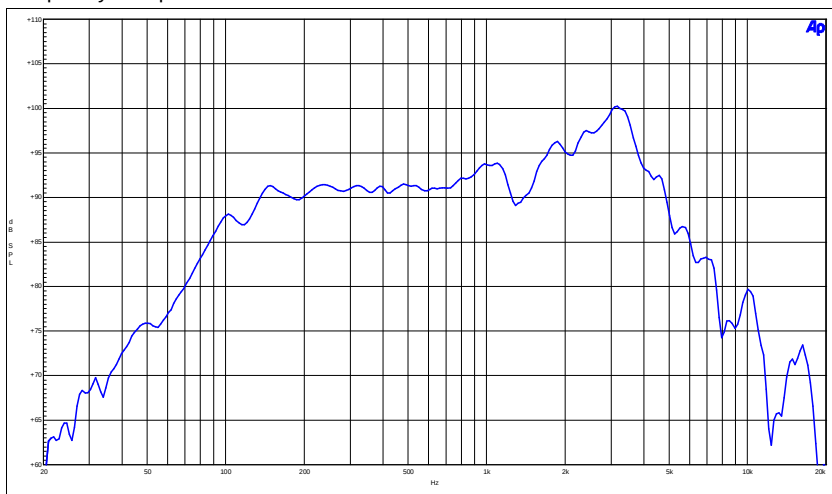

Impedance

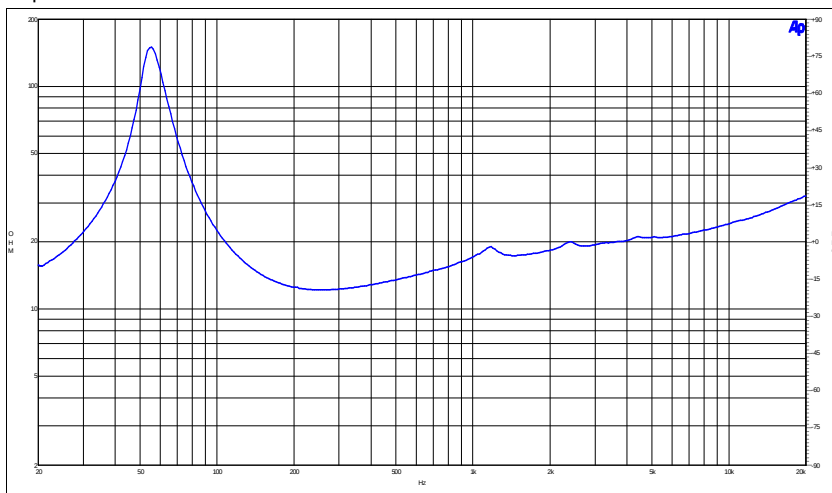

Specifications

Nominal Diameter	8"
Nominal Impedance	16 Ω
Minimum Impedance	12,2 Ω
Power Handling	
Nominal ¹	250 W
Continuous Program ²	500 W
Sensitivity (1W/1m) ³	93 dB
Frequency Range	Fs to 4000 Hz
Voice Coil Diameter	51,00 mm
Winding Material	Copper
Former Material	Fiber Glass
Winding Depth	16,50 mm
Magnetic Gap Depth	8 mm
Flux Density	1,150 T
Surround Material	Rubber
Surround Shape	Roll
Spider Material	PolyCotton
Magnet Material	Ceramic
Cone Material	Paper
Water Proof Front Side (WP)	☒
Water Proof Both Sides (TWP)	☐
Epoxy Treatment	☐
Demodulation Ring	☐
Shorting Copper Ring	☒
Double Spider	☐
Vented Gap	☐

11/04/2016

Thiele & Small Parameters⁴

Fs	59 Hz
Re	9,9 Ω
Qes	0,42
Qms	7,38
Qts	0,39
Vas	15,7 dm ³
Sd	220 cm ²
η_0	0,74 %
Xmax	6,5 mm
Xvar	8,00 mm
Mms	31,6 g
Bl	16,70 Txm
Le	0,83 mH
Cms	230,5 μ m/N

Mounting Information

Overall Diameter	225 mm (8,8 in)
Bolt Circle Diameter	210 mm (8,3 in)
Baffle Cutout Diameter	187 mm (7,4 in)
Depth	89 mm (3,5 in)
Flange / Gasket Thickness	9,5 mm (3/8 in)
Net Weight	3,5 Kg (7,7 lb)

(1) A.E.S. Standard

(2) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

(3) Applied RMS Voltage is set to 4V for 16 ohms Nominal Impedance. Average SPL from 100 to 1000 Hz

(4) Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.