


12 F 4 CP 8Ω

12" | 1400 W



Code Z008019

Professional

- SNDW** 4" Sandwich voice coil Kapton former
- DCSP** Double Cross Spider (DCS) with Progressive Waves
- DAR** Cloth surround with Double Asymmetric Rolls Technology (DAR)
- AWpT** Autoclave Waterproof Cone Treatment
- Ferrite** Magnet Circuit
- VMVc** Ventilated Magnet and Voice Coil to reduce Power Compression
- 97.3 dB sensitivity
- Frequency Range 48-3000 Hz

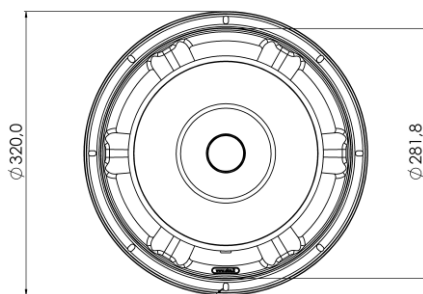

8 holes 6x9
on $\varnothing 301$ mm

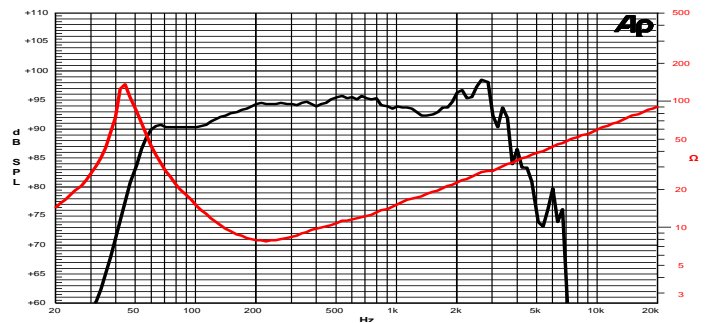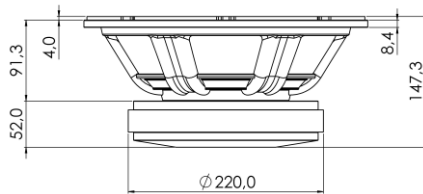

Frequency Response on 45 Lt @ 55 Hz Vented Box @ 1W, 1m
Free Air Impedance

General Specifications

Nominal Diameter	321 mm (12")
Nominal Impedance	8 Ω
Rated Power AES ⁽¹⁾	700 W
Continuous Program Power ⁽²⁾	1400 W
Sensitivity @ 1W/1m ⁽³⁾	97.3 dB
Voice Coil Diameter	100 mm (4")
Voice Coil Winding Depth	21 mm
Magnetic Gap Depth	10 mm
Flux Density	1.31 T
Magnet Weight	3300 g
Net Weight	11.7 kg

Thiele & Small Parameters⁽⁴⁾

R_e	5.2 Ω	F_s	46.0 Hz
Q_{ms}	7.50	Q_{es}	0.22
Q_{ts}	0.22	M_{ms}	96.0 g
C_{ms}	125 $\mu\text{m}/\text{N}$	B_{xl}	25.80 Tm
V_{as}	49.9 l	S_d	530.9 cm^2
$X_{max}^{(5)}$	+/-5.5 mm	$X_{var}^{(6)}$	+/-9.0 mm
η_0	2.14 %	L_e (1kHz)	1.58 mH

Constructive Characteristics

Magnet	Ferrite
Basket Material	Aluminium Die-Cast
Voice Coil Winding Material	Copper
Voice Coil Former Material	Kapton
Cone Material	Paper
Cone Treatment	Humidity Resistant Pulp
Surround Material	Treated Cloth
Dust Dome Material	Solid Paper

Mounting Information

Overall Diameter	320 mm
Baffle Cutout Diameter	284 mm
Mounting Holes	8 holes 6x9 on $\varnothing 301$ mm
Total Depth	147.3 mm

(1) Rated Power measured with 2-hour test with pink noise signal, 6dB crest factor, loudspeaker in free air, power calculated on rated Z_{min} . (2) Power on Continuous Program is defined as 3dB greater than the Rated Power. (3) Calculated by Thiele & Small parameters, for SPL average in box refer to frequency response. (4) Thiele & Small parameters measured with laser system after preconditioning test. (5) Measured with respect to a THD of 10%. (6) Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value. (7) Drawing dimensions: mm.