



- 3" sandwich voice coil Kapton former and aluminium winding
- Progressive wave Konex spider with DCS technology
- Cloth surround with DAR technology
- Autoclave waterproof cone treatment
- Neodymium magnet circuit with copper ring
- Cooling radiator and ventilated voice coil to reduce power compression
- 95.9 dB sensitivity




Specifications	
Nominal Diameter	268mm (10")
Nominal Impedance	4Ω
Rated Power AES <sup>(1)</sup>	350W
Continuous Program Power <sup>(2)</sup>	700W
Sensitivity @ 1W/1m <sup>(3)</sup>	95.9dB
Voice Coil Diameter	75mm (3")
Voice Coil Winding Depth	18mm
Magnetic Gap Depth	10mm
Flux Density	1.20T
Magnet Weight	360g
Net Weight	2.8kg

Thiele & Small Parameters <sup>(4)</sup>			
Re	3.10Ω	Fs	56.0Hz
Qms	13.33	Qes	0.27
Qts	0.26	Mms	47.3g
Cms	171μm/N	Bxl	13.77Tm
Vas	29.2l	Sd	346.4cm <sup>2</sup>
X max <sup>(5)</sup>	+/-4.0mm	X var <sup>(6)</sup>	+/-7.0mm
η <sub>0</sub>	1.73%	Le (1kHz)	0.30mH

Constructive Characteristics	
Magnet	: Neodymium
Basket Material	: Aluminium Die-Cast
Voice Coil Winding Material	: Aluminium
Voice Coil Former Material	: Kapton
Cone Material	: Paper
Cone Treatment	: Humidity Resistant Pulp
Surround Material	: Treated Cloth
Dust Dome Material	: Solid Paper

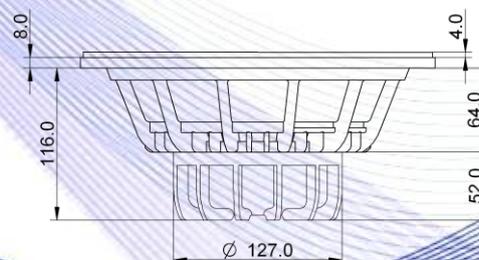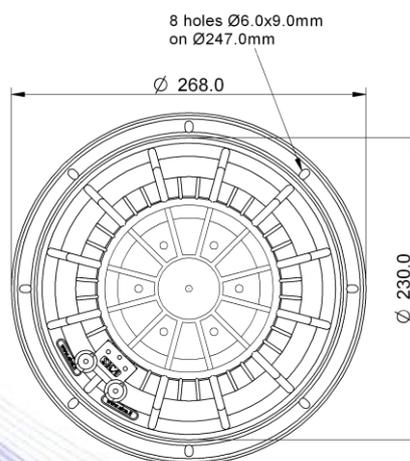

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

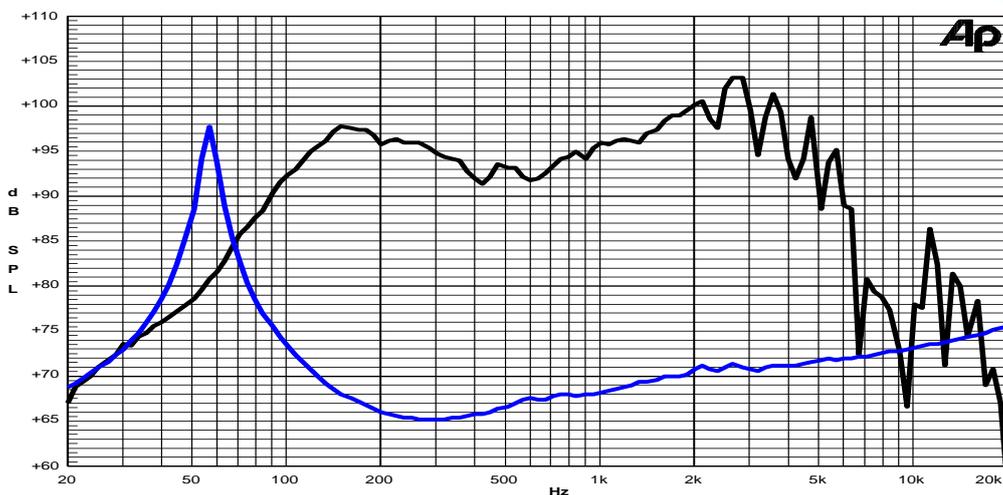

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
  - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
  - 3: Calculated by Thiele & Small parameters
  - 4: Thiele & Small parameters measured with laser system without preconditioning test
  - 5: Measured with respect to a THD of 10% using a parameter-based method
  - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
  - 7: Drawing dimensions: mm
  - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle