


- 2" voice coil Kapton former
- Autoclave waterproof cone treatment
- Ferrite magnet circuit
- 96.9 dB sensitivity




Specifications	
Nominal Diameter	266mm (10")
Nominal Impedance	4Ω
Rated Power AES ⁽¹⁾	150W
Continuous Program Power ⁽²⁾	300W
Sensitivity @ 1W/1m ⁽³⁾	96.9dB
Voice Coil Diameter	50mm (2")
Voice Coil Winding Depth	11mm
Magnetic Gap Depth	8mm
Flux Density	1.15T
Magnet Weight	1100g
Net Weight	3.4kg

Thiele & Small Parameters ⁽⁴⁾			
Re	3.03Ω	Fs	60.0Hz
Qms	6.45	Qes	0.33
Qts	0.31	Mms	30.8g
Cms	228μm/N	Bxl	10.36Tm
Vas	35.3l	Sd	330.1cm ²
X max ⁽⁵⁾	+/-2.0mm	X var ⁽⁶⁾	+/-3.5mm
η ₀	2.23%	Le (1kHz)	0.62mH

Constructive Characteristics	
Magnet	: Ferrite
Basket Material	: Pressed Sheet Steel
Voice Coil Winding Material	: Copper
Voice Coil Former Material	: Kapton
Cone Material	: Paper
Cone Treatment	: No
Surround Material	: Treated Cloth
Dust Dome Material	: Solid Paper

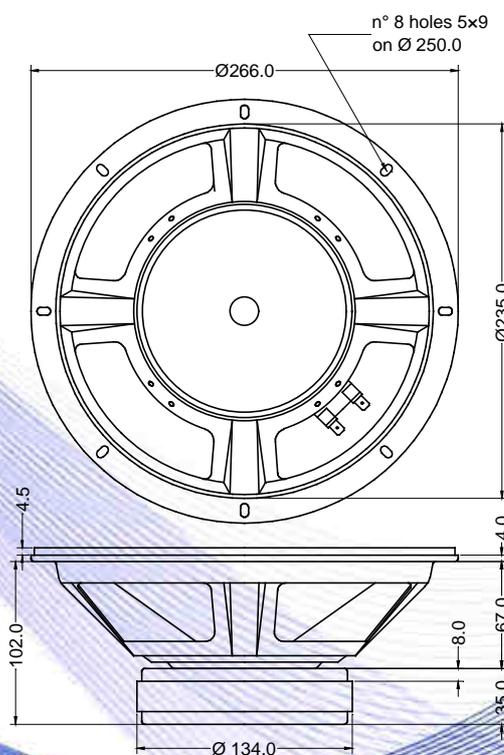

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

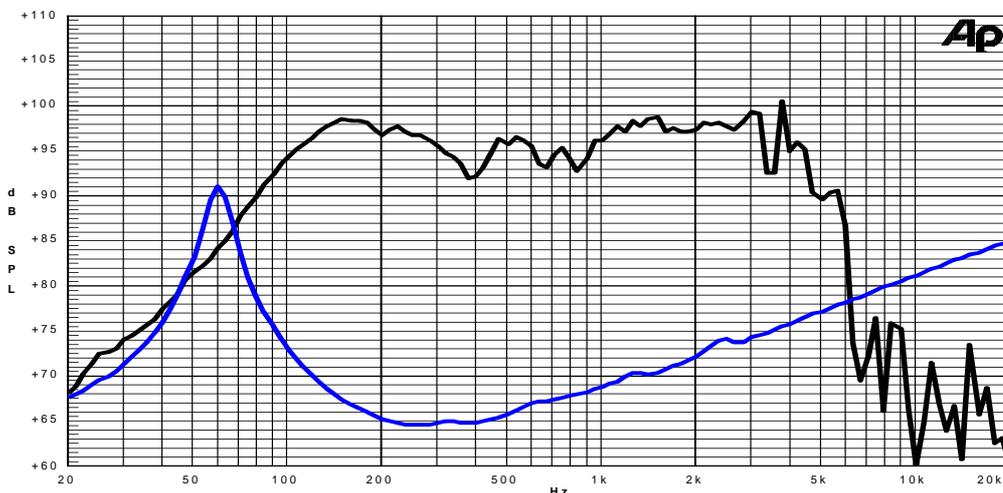

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Calculated by Thiele & Small parameters
 - 4: Thiele & Small parameters measured with laser system without preconditioning test
 - 5: Measured with respect to a THD of 10% using a parameter-based method
 - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
 - 7: Drawing dimensions: mm
 - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle