

## 12 N 3 PL 8Ω

## 12" | 800 W

## Code Z007983C

SNDW 3" Sandwich voice coil Fiberglass former and Aluminium Winding

PS Konex Spider with Progressive Waves

DAR Cloth surround with Double Asymmetric Rolls Technology (DAR)


WpT Waterproof Cone Treatment


Neodymium Magnet Circuit

VVc Ventilated Voice Coil to reduce Power Compression

98.5 dB sensitivity

Frequency Range 45-3000 Hz






<b>General Speci</b>	fications		
Nominal Diameter			320 mm (12")
Nominal Impedance			8 Ω
Rated Power AES (1)			400 W
Continuous Program Power (2)			800 W
Sensitivity @ 1W/1m <sup>(3)</sup>			98.5 dB
Voice Coil Diameter			75 mm (3")
Voice Coil Winding Depth			21 mm
Magnetic Gap Depth			10 mm
Flux Density			1.18 T
Magnet Weight			360 g
Net Weight			3.5 kg
Thiele & Smal	l Parameters (4)		
Re	5.0 Ω	Fs	46.0 Hz
Qms	7.50	Qes	0.31
Qts	0.30	Mms	56.5 g
Cms	220 µm/N	Bxl	16.00 Tm
Vas	87.91	Sd	530.9 cm <sup>2</sup>
X max <sup>(5)</sup>	+/-5.5 mm	X var <sup>(6)</sup>	+/-9.0 mm
no	2.68 %	Le (1kHz)	0.80 mH









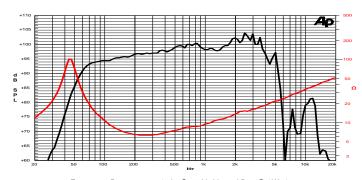

Frequency Response on 45 Lt @ 55 Hz Vented Box @ 1W, 1m Free Air Impedance

## **Constructive Characteristics**

Magnet	Neodymium	
Basket Material	Aluminium Die-Cast	
Voice Coil Winding Material	Aluminium	
Voice Coil Former Material	Fiberglass	
Cone Material	Paper	
Cone Treatment	Surface Waterproof Treatment	
Surround Material	Treated Cloth	
Dust Dome Material	Solid Paper	
Mounting Information		
Overall Diameter	320 mm	
Baffle Cutout Diameter	284 mm	
Mounting Holes	8 holes 6x9 on ø301 mm	
Total Depth	135.4 mm	

(1) Rated Power measured with 2-hour test with pink noise signal, 6dB crest factor, loudspeaker in free air, power calculated on rated Zmin. (2) Power on Continuous Program is defined as 3dB greater than the Rated Power. (3) Calculated by Thiele & Small parameters, for SPL average in box refer to frequency response. (4) Thiele & Small parameters measured with laser system after preconditioning test. (5) Measured with respect to a THD of 10%. (6) Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value. (7) Drawing dimensions: mm.