SICA)) loudspeakers ®

15 F 4 CP 8Ω

15" | 1400 W


Code Z008321

SNDW 4" Sandwich voice coil Kapton former
DCS Double Cross Spider (DCS)
DAR Cloth surround with Double Asymmetric Rolls Technology (DAR)
AWpT Autoclave Waterproof Cone Treatment
Ferrite Magnet Circuit
VWvc Ventilated Magnet and Voice Coil to reduce Power Compression
99.4 dB sensitivity
Frequency Range 40-2000 Hz




Professional



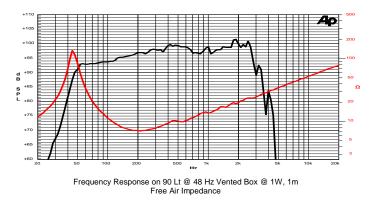

Constructive Characteristics			
Magnet	Ferrite		
Basket Material	Aluminium Die-Cast		
Voice Coil Winding Material	Copper		
Voice Coil Former Material	Kapton		
Cone Material	Paper		
Cone Treatment	Humidity Resistant Pulp		
Surround Material	Treated Cloth		
Dust Dome Material	Solid Paper		
Mounting Information			
Overall Diameter	388 mm		
Baffle Cutout Diameter	355 mm		
Mounting Holes	8 holes 6x9 on ø371 mm		
Total Depth	169 mm		

(1) Rated Power measured with 2-hour test with pink noise signal, 6dB crest factor, loudspeaker in free air, power calculated on rated Zmin. (2) Power on Continuous Program is defined as 3dB greater than the Rated Power. (3) Calculated by Thiele & Small parameters, for SPL average in box refer to frequency response. (4) Thiele & Small parameters measured with laser system after preconditioning test. (5) Measured with respect to a THD of 10%. (6) Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value. (7) Drawing dimensions: mm.



General Speci	fications		
Nominal Diamete	r		389 mm (15")
Nominal Impedar	nce		8 Ω
Rated Power AE	S ⁽¹⁾		700 W
Continuous Prog	ram Power ⁽²⁾		1400 W
Sensitivity @ 1W	//1m ⁽³⁾		99.4 dB
Voice Coil Diame	ter		100 mm (4")
Voice Coil Windir	ng Depth		19 mm
Magnetic Gap De	epth		10 mm
Flux Density			1.30 T
Magnet Weight			3300 g
Net Weight			12.1 kg
Thiele & Smal	l Parameters (4)		
Re	5.1 Ω	Fs	46.4 Hz
Qms	7.73	Qes	0.28
Qts	0.27	Mms	126.0 g
Cms	93 µm/N	Bxl	26.00 Tm
Vas	97.01	Sd	855.3 cm ²
X max ⁽⁵⁾	+/-7.0 mm	X var ⁽⁶⁾	+/-10.0 mm
ηο	3.37 %	Le (1kHz)	1.22 mH