



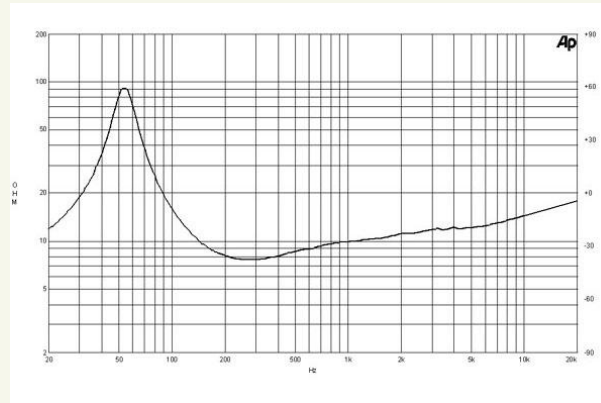

# 10PS26

# Woofer

700 W continuous program power capacity  
 76 mm (3 in) aluminium voice coil  
 55 – 4000 Hz response  
 96 dB sensitivity  
 Shorting copper cap for extended HF response

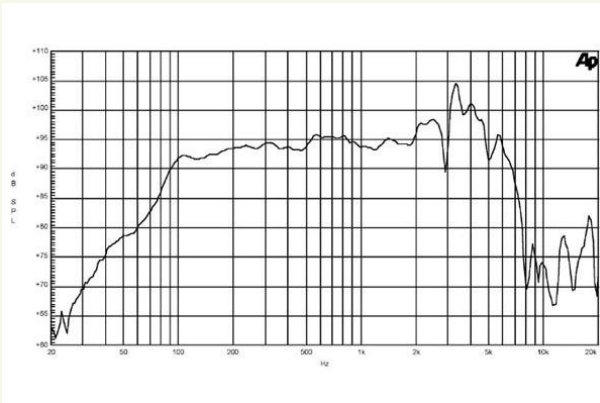

LF Drivers  
 Coaxials  
 HF Drivers  
 Horns

## Specification

Nominal Diameter	250 (10) mm (in)
Nominal Impedance (1)	8 Ohm
Minimum Impedance	7.1 Ohm
Nominal Power Handling (2)	350 W
Continuous Power Handling (3)	700 W
Sensitivity (1W/1m) (4)	96 dB
Frequency Range	55 - 4000 Hz
Voice Coil Diameter	76 (3) mm (in)
Winding Material	Aluminium
Former Material	Glass Fibre
Winding Depth	18 (0.71) mm (in)
Magnetic Gap Depth	10 (0.4) mm (in)
Flux Density	0.9 T

## Thiele & Small Parameters

Fs	54 Hz
Re	5.8 Ohm
Qes	0.33
Qms	2.9
Qts	0.29
Vas	38 (1.3) dm3 (ft3)
Sd	320 (49.1) cm2 (in2)
Eta Zero	1.8 %
Xmax	+/- 5.5 mm
Xvar	+/- 5 mm
Mms	33 g
Bl	14.1 Txm
Le	1.2 mH

## Mounting and Shipping Info

Overall Diameter	262 mm (10.3 in)
Bolt Circle Diameter	245 mm (9.6 in)
Baffle Cutout Diameter	230 mm (8.8 in)
Depth	123 mm (4.8 in)
Flange and Gasket Thickness	14 mm (0.55 in)
Net Weight	6 kg (13.2 lb)
Shipping Weight	6.7 kg (14.7 lb)
Shipping Box	320x320x160 mm (12x12x6.3 in)

- <sup>1</sup>For different impedances, please ask.
- <sup>2</sup>2 hours test made with continuous pink noise signal (6 dB crest factor). Power calculated on rated minimum impedance.
- <sup>3</sup>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- <sup>4</sup>Applied RMS Voltage is set to 2.83V for 8 ohms or 2.0V for 4 ohms Nominal Impedance

